

## The NIEHOFF-SV-Spooler Product Family

type (double spooler)	SV 400 D	SV 401 D	SV 410 D	SV 630 D
max. production speed (m/min):	1200	600/500 (NPS 400/400)	1500	1500
production range				
cable cross-section (mm <sup>2</sup> ):	0.22 ... 6.0 (flexible Cu conductor)	0.22 ... 6.0 (flexible Cu conductor)	0.22 ... 6.0 (flexible Cu conductor)	0.22 ... 10.0 (flexible Cu conductor)
cable outer dia. (mm):	1.0 ... 5.0 (including insulation)	1.0 ... 5.0 (including insulation)	1.0 ... 5.0 (including insulation)	1.0 ... 8.0 (including insulation)
spool sizes	NPS-multiway-system	NPS-multiway-system	NPS-multiway-system	NPS-multiway-system, DIN spool
flange dia. (mm):	400 400 400 400	400 400 400	400 400 400 400	600 400 630
winding width (mm):	400 250 150 100	400 250 150	400 250 150 100	400 400 400

type (single spooler)	SV 400	SV 600
max. production speed (m/min):	400	400
production range		
cable cross-section (mm <sup>2</sup> ):	0.22 ... 6.0 (flexible Cu conductor)	0.22 ... 6.0 (flexible Cu conductor)
cable outer dia. (mm):	1.0 ... 5.0 (including insulation)	1.0 ... 5.0 (including insulation)
spool sizes	NPS-multiway-system	NPS-multiway-system
flange dia. (mm):	400 400 400 400	600 400 400 400 400
winding width (mm):	400 250 150 100	315 400 250 150 100



(We reserve the right to modify technical specifications according to technical improvement and advances)

MASCHINENFABRIK NIEHOFF GmbH & Co. KG  
Fürther Str. 30  
91126 Schwabach, Germany  
Telephone: +49 9122 977-0  
Telefax: +49 9122 977-155  
E-Mail: info@niehoff.de  
Internet: www.niehoff.de

NIEHOFF ENDEX NORTH AMERICA INC.  
1 Mallard Court  
Swedesboro, NJ 08085, USA  
Telephone: +1 856 803 1800  
Telefax: +1 856 467 0584  
E-Mail: sales@niehoffendex.com

NIEHOFF-HERBORN MÁQUINAS Ltda.  
CP 84 (Rua Mar Vermelho, 1092)  
06412-140 Barueri, S.P., Brazil  
Telephone: +55 11 4199-3600  
Telefax: +55 11 4199-3624  
E-Mail: info@niehoff.com.br

Branch of Maschinenfabrik NIEHOFF GmbH & Co. KG in the Russian Federation  
Storozhevaya Ulitsa 4/1  
Moscow, 111020, Russian Federation  
Telephone: +7 495 23055-37, -38  
Telefax: +7 495 23055-39  
E-Mail: info@niehoff.de

MASCHINENFABRIK NIEHOFF GmbH & Co. KG  
Shanghai Representative Office  
Room 2302, Hong Kong Plaza,  
283 Huai Hai Zhong Road  
Shanghai 200021, P.R. China  
Telephone: +86 21 61202800  
Telefax: +86 21 63906192  
E-Mail: info@niehoff.cn

MASCHINENFABRIK NIEHOFF GmbH & Co. KG  
Schwendener Str. 25  
87616 Marktberdorf/Leuterschach,  
Germany  
Telephone: +49 8342 7008-0  
Telefax: +49 8342 7008-40

MASCHINENFABRIK NIEHOFF GmbH & Co. KG  
Dubai Branch  
DAZFA Free Trade Zone  
P.O. Box 293821  
Dubai, United Arab Emirates  
Telephone: +971 4 2045-153  
Telefax: +971 4 2045-154  
E-Mail: m.dalal@niehoff.de

NIPPON NIEHOFF Co., Ltd.  
Repro Kanda Building  
17, Kanda Tomiyama-Cho  
Tokyo, 101-0043 Japan  
Telephone: +81 3 3257 0911  
Telefax: +81 3 3257 0910

MASCHINENFABRIK NIEHOFF GmbH & Co. KG  
Singapore Representative Office  
122 Middle Road, # 04-04 Midlink Plaza  
Singapore 188973, Singapore  
Telephone: +65 6336 9936  
Telefax: +65 6336 4070  
E-Mail: niehoff@pacific.net.sg

NIEHOFF of INDIA Private Limited  
Plot No. 186-194, Industrial Park, Phase III  
Pashamylaram, Patancheru 502319,  
Medak District, AP, India  
Telephone: +91 8455 224-391, -392, -393  
Telefax: +91 8455 224-394

## NPS

## NIEHOFF Multiway Spools

With accessories



NIEHOFF – worldwide  
most advanced technology for  
the wire and cable industry

machines – systems – know-how – worldwide


NPS

# NIEHOFF Package System Spools

## Technical data/prices

type	NPS 600/400	NPS 400/400	NPS 400/250	NPS 400/150	NPS 400/100	NPS 400/284	NPS 630 Litze	NPS 400/400 XLPE
flange dia. (mm):	600	400	400	400	400	284	630	400
traverse height (mm):	400	400	250	150	100	400	375	400
winding capacity (dm <sup>3</sup> ):	66.4	30.3	17.6	10.0	4.5	20.8	73.5	30.3
price/unit (Euro)								
over 500 spools:	48.00	18.50	19.00	21.00	21.00	21.00	175.00	69.00
over 1000 spools:	47.00	18.00	18.50	19.50	19.50	20.00	172.00	61.00
over 2000 spools:	46.00	17.50	18.00	19.00	19.00	19.50	168.00	59.00
over 3000 spools:	45.00	17.00	17.50	18.50	18.50	19.00	164.00	58.50
over 4000 spools:	44.00	16.50	17.00	18.00	18.00	18.50	160.00	58.00

(Price basis: ex works NIEHOFF Schwabach, Germany, unpacked and uninsured; colours: spool: white, locking device: red, other colours on request; prices: valid from 01/07/2006. We reserve the right to alter prices and to modify technical specifications according to technical improvement and advances.)

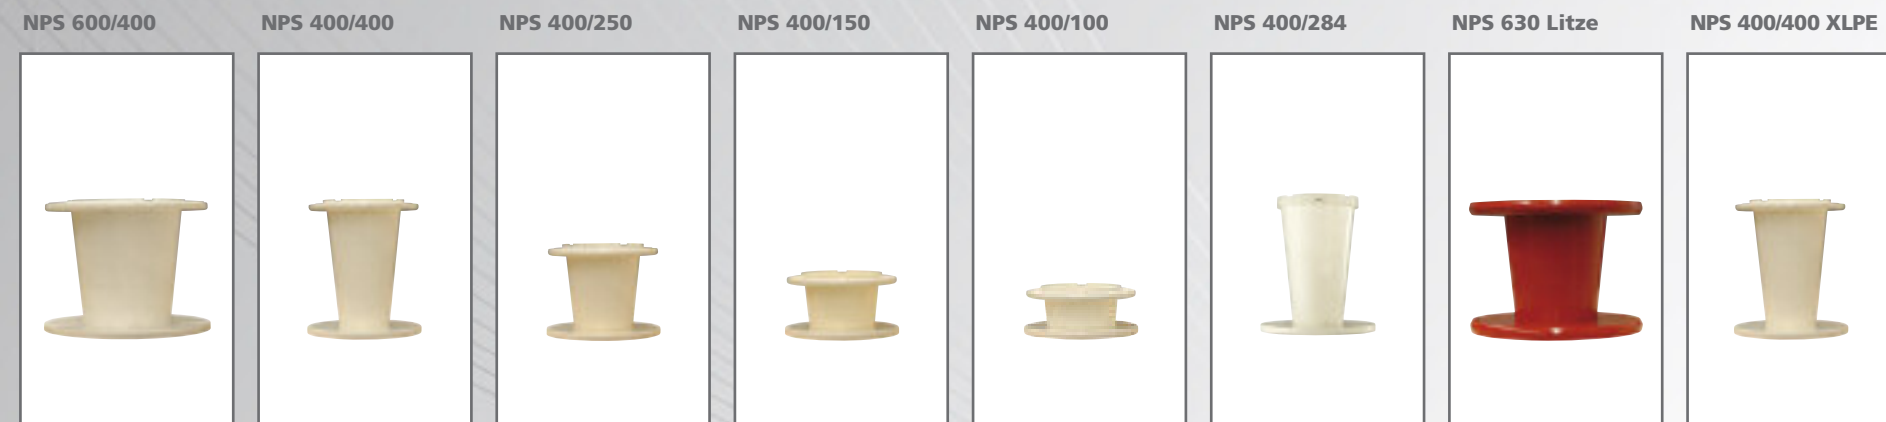

## An Investment with Effect on Rationalisation and Cost Cutting

Make your investment decision at taking all process steps into consideration: drawing, bunching, extruding, transporting and cutting to length

### Advantages

- use of packing material is avoided, NPS-spools are durable and can be reused many times
- simplification of transport, minimization of storage space and staff deployment
- reduction of cable scrap rate
- further processing of cutting and crimping is optimized
- tangle-free wire pay-off at highest speeds

For more details please contact us.



ID-No.	Description	Price per unit (Euro)
320 930 (2+3+4)	pay-off AUV 400 P for NPS 400 spool, carriage with tray and pay-off cover	670.00
320 973 (2+3)	pay-off AUV 400 P for NPS 400 spool, carriage with tray, without pay-off cover	570.00
320 932 (3+4)	pay-off AUF 400 P for NPS 400 spool, tray with pay-off cover, without carriage	360.00
292 588 (4)	pay-off cover for NPS 400 spool	120.00
320 985 (1)	CrNi ring insert	230.00
335 112 (5)	height adjustable spool support for NPS 400/250 spool and NPS 400/150 spool, without tray and carriage	400.00
225 989 (6)	lifting device for spool NPS 400 spool, load capacity 150 kg	300.00
226 934	lifting device for NPS 600 spool, load capacity 500 kg	600.00
234 291 (7)	handles for NPS 400 spool and NPS 600 spool, one pair per spool necessary (price is stated per pair)	100.00